

ATLANTA

SUBMERSIBLE SEWAGE PUMP



KS-10



KS-30



KS-100G

(MADE IN TAIWAN)

KS Series


IP68 protection and F class insulation.

Low temperature rising durable for long service life.

Built in thermal overload protector.

Durable mechanical seal.

High efficiency hydraulic suction for energy saving.

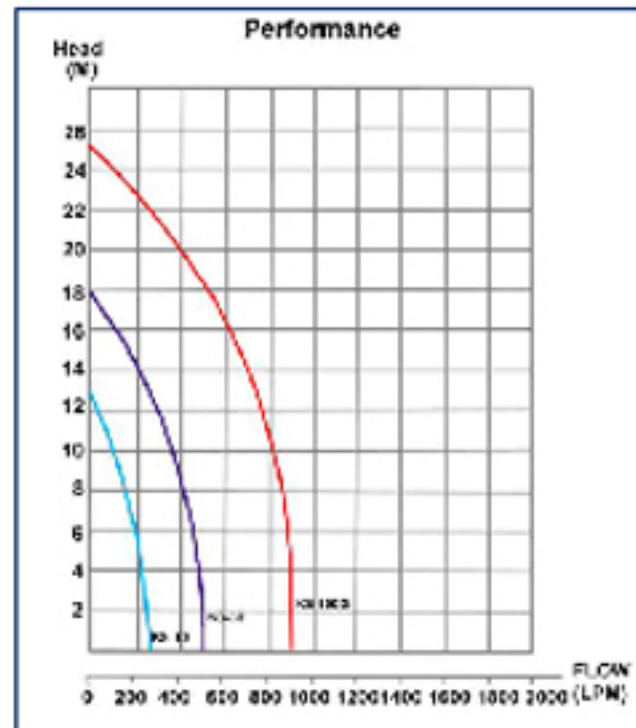

Technical Specification:

MODEL	KS-10-1	KS-30-3	KS-100G-3
Power	0.75kw	2.2kw	7.5kw
Voltage	Single Phase 240v	Three Phase 415v	Three Phase 415v
Flow Rate (l / min)	240	500	900
Max Head (m)	13	18	25
Output	2"	3"	6"
Weight (kg)	21	42	70
Dimension (LxWxH) mm	290 x 180 x 425	390 x 250 x 450	550 x 310 x 610

Designs and specifications are subject to change for improvement without prior notice.

2010 (JAN) - Rev. 0

LIGHT CONSTRUCTION MACHINERY ~ 94 ATLANTA SUBMERSIBLE SEWAGE PUMP